



Description

Ceiling fan with an energy-efficient DC motor, suitable for rooms ranging from 140 to 189 sq ft. Features 6 adjustable speeds and a remote control with programmable timer (included). The quiet DC motor provides precise speed control, smooth acceleration and deceleration, and up to 70% lower energy consumption than conventional fan motors. Its lightweight design facilitates installation, while the reverse function helps improve heating efficiency during colder months. Suitable for sloped ceilings, ensuring optimal positioning and performance.

Specifications

Motor Type: DC Motor.

Electrical Specifications: 110V-120V - 50/60Hz - Dry locations only.

Control System: 0-10V Compatible.

Fan Power (W): 5-7-9-13-19-28.

RPM: 90-115-135-158-185-210.

Airflow (CFM): 2877-3662-4485-5118-5924-6318.


Sound Intensity (dBA): 39-40-44-47-51-54.

Number of Blades: 3.

Maximum Tilt: 12°.

Control Type: Remote Control with timer.


Reverse Function

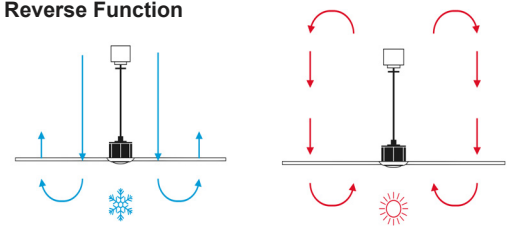


Reversible summer/winter function optimizes airflow for seasonal comfort and improves heating efficiency by redistributing warm air.

Dimensions

Ø51"1/8 x 10"H - Cod. 33814-US / 33815-US / 33816-US / 33817-US

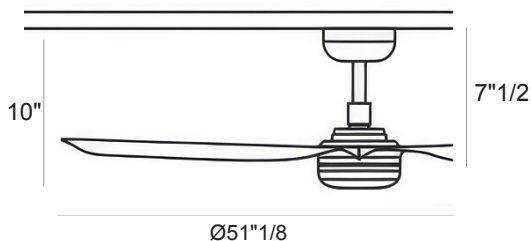

Installation for sloping ceilings



Suitable for sloping ceilings, which enables the shank to fall vertically so that the fan is always flat with respect to the ceiling and ensures the best operation and comfort.

Finishes & Materials

Structure: Steel.

Blades: ABS.