



Description

Ceiling fan featuring FSC/PEFC-certified wood blades. Available in M and L sizes, it is equipped with an energy-efficient DC motor offering 6 adjustable speeds and a summer/winter reverse function for year-round air circulation. The DC motor ensures quiet operation, precise speed control, and reduced energy consumption compared to conventional fan motors. Suitable for sloped ceilings.

Specifications

Motor Type: DC Motor.

Electrical Specifications: 110V-120V - 50/60Hz - Dry locations.

Light Source: 15W - E26 LED - 0-10V Compatible - CRI >80.

Fan Power (W): 5-7-11-17-24-35 (size M) or 12-13-16-20-25-35 (size L).

RPM: 90-119-144-170-192-220 (size M) or 108-115-123-134-142-156 (size L).

Airflow (CFM): 2051-3225-3915-4610-5219-5878 (size M) or 3247-3781-4309-4774-5263-5698 (size L).

Sound Intensity (dBA): 29-29-31-35-39-43 (size M) 29-29-31-34-38-40 (size L).

Number of Blades: 3.


Maximum Tilt: 12°.

Control Type: Remote control.


Dimensions

M) Ø49"1/4 x 16"H - Cod. 342801B-US, 342831B-US, 342771B-US

L) Ø59" x 16"H - Cod. 342761B-US, 342821B-US

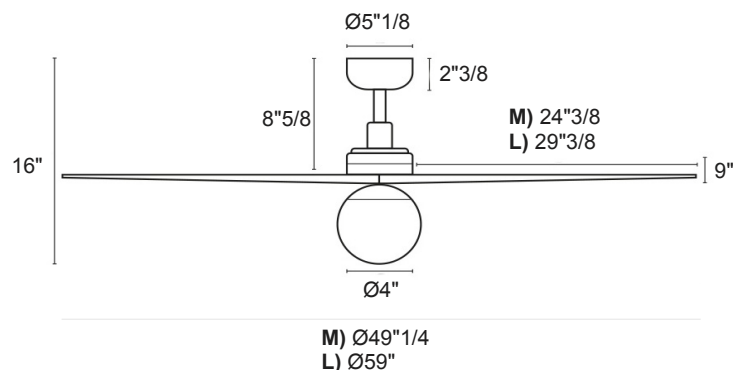

Reverse Function

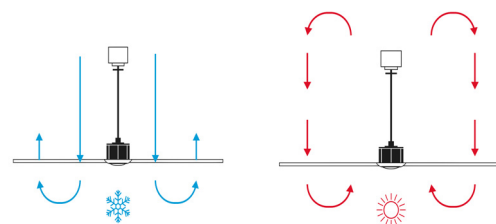

Reversible summer/winter function optimizes airflow for seasonal comfort and improves heating efficiency by redistributing warm air.

Finishes & Materials

Structure: Steel.

Blades: FSC/PEFC certified wood.

Diffuser: Glass.